


KITSE1791_PP68_H__



MEDIA
MEASURED
LIQUIDS



PIPE DIAMETER
FROM DN 6
UP TO DN 25,4

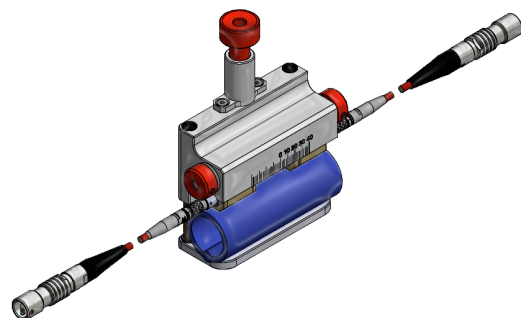

SALES DESCRIPTION

- Set of 2 probes with their support
- External probes for liquid flow measurement on a full pipe
- Mounting on a pipe from DN 6 up to DN 25,4
- Maximum operating temperature of 80°C
- Push-Pull connection
- Support included

INSTALLATION

Non intrusive

APPLICATION

Full pipe

CONDITIONS OF USE

Standard

DIAMETER OF THE PIPE

From 6 to 25,4mm on water application (other fluid: please ask Ultraflux)

THICKNESS OF THE PIPE

> 0,4 mm

CONNECTIC

Push-Pull connectors

MOUNTING TYPE

V, W (depending on pipe diameter)

TEMPERATURE

From -20°C to +80°C

COMPATIBLE CONVERTERS

ALL

ATEX CERTIFICATION

NO

INGRESS PROTECTION

EN/IEC 60529 IP54

SUPPORT TYPE

Specific

MATERIAL OF THE PROBES

Peek

MATERIAL OF THE SUPPORT

Anodized aluminum

OVERALL SIZE (support & probes)

121 x 99 x 38 mm

OVERALL WEIGHT (support & probes)

300 g (without cable)

SENSOR FREQUENCY

2 MHz

NON CONTRACTUAL DOCUMENT